

Cloth & Poly Coated Duct

Masking

Specialty

Double-Sided

Strapping

Electrical

Film

Box Sealing

Construction

Dispensers



Industrial Catalog

cantech.com



Quick Reference Guide

Code Cloth & Poly Coated Duct Tapes

65-**	General Purpose Cloth Tape	2
80-00	High Performance Poly Coated Clear Duct Tape	2
88-**	Production Grade Poly Coated Duct Tape	2
93-21	Economy Grade Poly Coated Duct Tape	2
94-**	General Purpose Poly Coated Duct Tape	2
96-21	Industrial Grade Poly Coated Duct Tape	2
98-**	Contractor Grade Poly Coated Duct Tape	2
99-21	Premium Grade Poly Coated Duct Tape	2

Code Masking Tapes

101-00	Industrial Grade Masking Tape	3
102-00	Utility Grade Masking Tape	3
103-00	Economy Industrial Masking Tape	3
104-00	Automotive Production Grade Masking Tape	3
105-00	Temperature Performance Masking Tape	3
107-00	General Purpose Masking	3
108-08	UV Resistant 14 Day Blue Masking Tape	3
109-07	Premium Safe Tack Masking Tape	3
110-00	Automotive Masking Tape	3
111-00	Automotive Masking Tape	3
115-00	Drafting Tape	3
118-08	UV Resistant 30 Day Blue Masking Tape	4
120-**	Colored Masking Tape	4
122-00	Production Grade Masking Tape	4
125-00	High Temperature Masking Tape	4
127-00	OEM Grade Masking Tape	4
128-08	Premium 10 Day Blue Masking Tape	4

Code Specialty Tapes - Single Coated

91-21	Premium Aluminum Foil Tape	5
134-04	Extensible Flatback Kraft Splicing Tape	5
139-04	Extensible Flatback Kraft Box Sealing Tape	5
141-00	Process Indicator Tape	5
144-00LF	Processor Indicator Tape Lead/Latex Free	5
152-70 to 76	Low Density Closed Cell PVC Foam Tape	6
157-00	Kapton® (Polyimide) Film Tape	7
158-00/162-12	Teflon® (PTFE) Film Tape	7
204-**	UV Treated Polypropylene Tape	7
217-07	Polyester Film/Silicone Adhesive Tape	7
218-21	Silver Metalized Polyester Film Tape	7
537-**	Self Fusing Silicone Tape	7
570-08	Blue PVC Fine Line Masking Tape	7
571-Colors	Solid Colored PVC Tape	8
571-Striped	Striped Colored PVC Tape	8
574-Colors	Solid Colored Polyethylene Tape	8
583-01	10mil Pipe Wrap Tape	8

Code Specialty Tapes - Double Coated

85-00	Double Sided Cloth Tape	9
87-01	Double-Sided Outdoor Carpet Tape	9
401-00	High Performance Double Sided Tissue Tape	9
403-00	Double Sided Crepe Paper Tape	9
404-00	Double Sided Flatback Paper Tape	9
406-00	Double Sided High Tensile Flatback Tape	9
407-00	Double Sided Crepe Paper Tape	9
408-00	Double Sided Polyester Tape	9
409-00	Double Sided UPVC Tape	9
412/414-00	Reverse Wound Adhesive Transfer Tape	10
412-30	Regular Wound Adhesive Transfer Tape	10
413-92	Scrim Reinforced Adhesive Transfer Tape	10
414-30	Regular Wound Adhesive Transfer Tape	10
420/421/422-10	Double Sided Close Cell Polyethylene Foam Tape	10
425/426	Very High Bond Acrylic Tape	10
431-00	Double-Coated Polyethylene Film	10
448-00	Double-Coated Polyester Film	10
85109	Enclosure (Double-Sided) Tape	10

Code Strapping & Filament Tapes

172-**	MOPP Strapping Performance Appliance Tape	13
173-00	Polyethylene Pallet Stretch Tape	13
174-10	MOPP Utility Strapping Tape	13
175-01	MOPP General Purpose Strapping Tape	13
176-**	MOPP Utility Strapping Tape	13
179-00	General Purpose Filament Tape	13

180-00	Industrial Grade Filament Tape	13
181-00	High Tensile Filament Tape	13
183-00	Cold Application Filament Tape	13
184-00	Paper Backed Filament Tape	13
188-00	High Performance Filament Tape	13
191-00	Bi-Directional Filament Tape	13

Code Electrical Tapes

330-01/330-**	Vinyl 7mil UL-CSA Electrical Tape	14
388-01	Vinyl 8mil UL-CSA Electrical Tape	14
389-01	Vinyl 8.5mil UL-CSA Electrical Tape	14

Code Film Tapes

206-00	Cellulose Tape	15
208-00	Clear BOPP Office Tape	15
210-72	Premium Grade Packaging Film Tape	15
222-**	PVC Produce Bundling Tape	15
280-00	Matte Polypropylene Tape	15

Code Box Sealing Tapes - Hand Rolls

223-**	Polyester (PET) Box Sealing Tape	16
225-**	Polyester (PET) Box Sealing Tape	16
227-**	High Performance Polyester Box Sealing Tape	16
229-**	Heavy Duty BOPP Box Sealing Tape	16
231-**	Premium BOPP Box Sealing Tape	16
233-**	Industrial Grade BOPP Box Sealing Tape	16
235-**/237-**	Production Grade BOPP Box Sealing Tape	16
239-00	Label Protection Tape	16
241-00/241-**	Cold Application BOPP Box Sealing Tape	17
243-**	General Purpose BOPP Box Sealing Tape	17
253-**	USA BOPP Box Sealing Tape	17
257-00	Aqueous Based Acrylic Adhesive BOPP Box Sealing Tape	17
263-**	Economy Grade BOPP Box Sealing Tape	17
6235-**	Stock Printed Box Sealing Tape	17

Code Box Sealing Tapes - System Length Rolls

121-11	System Length Paper Box Sealing Tape	18
224-**	Polyester (PET) Box Sealing Tape	18
226-**	Polyester (PET) Box Sealing Tape	18
228-**	High Performance Polyester Box Sealing Tape	18
230-**	Heavy Duty BOPP Box Sealing Tape	18
232-**	Premium BOPP Box Sealing Tape	18
234-**	Industrial Grade BOPP Box Sealing Tape	18
236-**/238-**	Production Grade BOPP Box Sealing Tape	18
242-00/242-**	Cold Application BOPP Box Sealing Tape	19
244-**	General Purpose BOPP Box Sealing Tape	19
254-**	USA BOPP Box Sealing Tape	19
258-00	Aqueous Based Acrylic Adhesive BOPP Box Sealing Tape	19
264-**	Economy Grade BOPP Box Sealing Tape	19










Code Construction Tape

85109	Enclosure (Double-Sided) Tape	20
89-21/90-21	Aluminum Foil Tape	20
168-01	General Purpose Anti-Slip Tape	20
201-21	Metalized BOPP Splicing and Seaming Tape	20
202-**	FlexPro® UL-181B-FX Listed Flexible Duct Tape	20
204-**	Contractor's Sheathing Tape	21
249/250-**	Polyethylene Masking Tape for Stucco Application	21
251/252-**	Polyethylene Tape	21
277-10/278-10	Polyethylene Splicing/Masking Tape	21
560-**	Adhesive Mats	21
560-08	Adhesive Mats on a base	21

Code Dispensers

805	Cello-Desk Tape Dispenser	22
806	Cello-Executive Desktop Dispenser	22
808	ATG Dispenser	22
841	Box Sealer (Mouse Trap) Dispenser	22
842	Adjustable Tension Box Sealer Dispenser	22
845	Adjustable Tension Box Sealer Dispenser	22
846	Box Sealer (Mouse Trap) Dispenser	22
860	Produce Bag Sealer Dispenser With Bag Trimmer	22
889	Strapping Tape Dispenser	22

Cloth & Poly Coated Duct

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 65-** 2 Colors	General Purpose Cloth Tape. Uses: Finger protection from sharp edges, automotive wire harness tape. Conforms well and can be torn by hand. Available dimensions: Widths – 24mm, 48mm • Lengths – 55m.	NR	40	25	10	4
	Black (01) White (10)					
 80-00 Clear (00)	High Performance Poly Coated Clear Duct Tape. Uses: Splicing, holding, patching and repairing a variety of surfaces. Outdoor UV applications. Available dimension: Width – 48mm • Lengths – 55m.	BR	25	80	9	20
 88-**	Production Grade Poly Coated Duct Tape - High Shear, High Tack. Uses: Good Moisture and Water Resistance. Conforms well and can be torn by hand. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m.	NR	20	55	6	24
	Black (01) Silver (21)					
 93-21 Silver (21)	Economy Grade Poly Coated Duct Tape - Balanced Construction. Uses: Repair, Water Resistant Packaging, Duct Work. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m.	NR	21	65	7	25
 94-21 Silver (21)	General Purpose Poly Coated Duct Tape - Thicker Film and Adhesive Mass. Uses: Repair, Water Resistant Packaging, Duct Work. Available dimensions: Widths – 24mm, 36mm, 48mm, 72mm, 96mm • Lengths – 55m.	NR	25	65	8.5	26
 94-Colors 8 Colors	General Purpose Poly Coated Duct Tape - Thicker Film and Adhesive Mass. Uses: Color Coding, Bookbinding, Identification. Available dimension: Width 48mm • Lengths 55m.	NR	25	65	8.5	26
	Black (01) Red (02) Brown (03) Yellow (05)					
	Green (07) Blue (08) White (10) Olive (19)					
 96-21 Silver (21)	Industrial Grade Poly Coated Duct Tape - Meets UL 723 Requirements. Uses: HVAC works where Flame Retardant is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	NR	27	65	10	28
 98-** 2 Colors	Contractor Grade Poly Coated Duct Tape - High Tack & Adhesion Uses: For Abatement Projects Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	NR	27	70	9	28
	Black (01) Silver (21)					
 99-21 Silver (21)	Premium Grade Poly Coated Duct Tape - Rugged Construction. Uses: Sandblasting, Patching Fiberglass and Metal, Overseas Packaging. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	NR	30	80	11	30

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesive: NR - Natural Rubber



Cantech offers a complete range of polycoated duct tapes including general purpose, asbestos removal, industrial grade for sandblasting and premium grade for special projects.

Masking







Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 101-00	Industrial Grade Masking Tape - Resist to 266°F for 60 minutes. Uses: Shelf ID, Splicing, Spray/Brush Painting & Bundling. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	16	30	6	10
 102-00	Utility Grade Masking Tape - Resist to 130°F for 30 minutes. Uses: Splicing, Light Bundling & Packaging. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	SR	14	55	4.5	7
 103-00	Economy Industrial Masking Tape - Resist to 158°F for 30 minutes. Uses: Indoor Masking, Holding, Bundling & Tabbing. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	18	27	5	9
 104-00	Automotive Production Grade Masking Tape - Resist to 194°F for 60 minutes. Uses: Automotive & Industrial masking applications. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	NR	17	23	5.5	6
 105-00	High Temperature Performance Masking Tape - Resist to 266°F for 60 minutes. Uses: Spray/Brush Painting, OEM & Silk Screening. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	25	30	6	8
 107-00	General Purpose Masking - Resist to 176°F for 60 minutes. Uses: Painting, Splicing & Light Bundling. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm, 36mm, 48mm, 72mm, 96mm • Lengths – 55m.	NR	16	28	5.4	7
 108-08	UV Resistant 14 Day Blue Masking Tape - Resist to 130°F for 30 minutes. Uses: Indoor & outdoor masking on clean and flat surfaces such as glass, metal & vinyl. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	SA	20	22	6	8
 109-07	Premium Safe Tack Masking Tape - Resist to 176°F for 30 minutes. Uses: 10 Day Clean removal. Resists most Paint and Lacquers. Furniture Industry. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	20	18	5	7
 110-00	Automotive Masking Tape - Resist to 176°F for 60 minutes. Uses: Specialty masking tape engineered for paint spray gun applications in Automotive and Manufacturing Industries. Available dimensions: Widths – 18mm, 36mm, 48mm • Lengths – 55m.	NR	24	25	6	8
 111-00	Automotive Masking Tape - Resist to 212°F for 60 minutes. Uses: Specialty masking tape engineered for paint spray gun applications in Automotive and Manufacturing Industries. Available dimensions: Widths – 18mm, 36mm, 48mm • Lengths – 55m.	NR	25	28	6	9
 115-00	Drafting Tape - Resist to 176°F for 30 minutes. Uses: Holding drawings, tracings and blueprints on drafting boards. Tabbing on rolls of paper and other materials. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	NR	18	15	5.5	7

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber WA - Water Acrylic SR - Synthetic Rubber (HM)

QUALITY TAPES FOR SO MANY APPLICATIONS

Masking

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %						
 118-08 Blue (08)	UV Resistant 30 Day Blue Masking Tape - Resist to 130°F for 30 minutes. Uses: Mask Glass, Metal, Plastic, PVC where long term UV Protection is required. Available dimensions: Widths – 24mm, 36mm, 48mm • Lengths – 55m.	WA	23	20	5	8						
 120-** 5 Colors	Colored Masking Tape - Resist to 130°F for 30 minutes. Uses: Available in 5 Colors for Color Coding, Bag Sealing & Dry Cleaner Marking. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 55m.	SR	19	55	5	6						
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td></td> </tr> </table>	Black (01)	Red (02)	Yellow (05)	Green (07)	Blue (08)						
Black (01)	Red (02)	Yellow (05)										
Green (07)	Blue (08)											
 122-00	Production Grade Masking Tape - Resist to 130°F for 30 minutes. Uses: Masking in High Speed Production, Splicing & Light Packaging. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	SR	19	55	5	7						
 125-00	High Temperature Masking Tape - Resist to 340°F for 30 minutes. Uses: OEM assembly lines, masking applications which require multiple heating stages. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	SR	25	35	6.5	7						
 127-00	OEM Grade Masking Tape - Resist to 212°F for 60 minutes. Uses: OEM applications, compatible with water born paints. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	NR	30	30	6.2	9						
 128-08 Blue (08)	UV Resistant 10 Day Blue Masking Tape - Resist to 176°F for 30 minutes. Uses: Mask Glass, Metal, Plastic, PVC where long term UV Protection is required. Available dimensions: Widths – 24mm, 36mm, 48mm • Lengths – 55m.	NR	22	18	5.4	7						






Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber WA - Water Acrylic SR - Synthetic Rubber (HM)



Our global Cantech® line includes a range of masking tapes for many uses, from general purpose painting grade to high temperature OEM applications.

Single Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 91-21 Silver (21)	Premium Aluminum Foil Tape - Linerless. Uses: Aircraft Paint Stripping, Heat Dissipation, Sound Dampening, Metal Patching. Available dimensions: Widths – 25.4mm, 50.8mm, 76.2mm • Lengths – 55m.	SA	28	55	5	5
 134-04 Brown (03)	Extensible Flatback Kraft Splicing Tape - Acid Free (Ph Neutral). Uses: Core & Paper Splicing, Picture Frame Backing Finish. Available dimensions: Widths – 24mm, 48mm, 72mm, 96mm • Lengths – 55m.	NR	45	45	6.5	7
 139-04 Brown (03)	Extensible Flatback Kraft Box Sealing Tape - Strength, Moisture Resistant. Uses: Carton Sealing, Patching, Splicing. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	SR	45	70	6	7
 141-00	Class 1 Process Indicator Tape - Confirms Sterilization Cycle when lines turn black. Not For Medical Use. Uses: React Positively under correct minimum levels of heat and moisture. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	NR	20	35	6.5	7
 144-00 LF	Class 1 Process Indicator Tape Lead/Latex Free - Confirms Sterilization Cycle when lines turn black. Uses: React Positively under correct minimum levels of heat and moisture. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	SR	20	30	6	7

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic SR - Synthetic Rubber (HM)



Single Coated



Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
152-70 1/16" Thick	Low Density Closed Cell PVC Foam Tape - 1/16" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 45.72m.	SA	—	12	62.5	—
152-71 1/8" Thick	Low Density Closed Cell PVC Foam Tape - 1/8" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 22.86m.	SA	—	12	125	—
152-72 3/16" Thick	Low Density Closed Cell PVC Foam Tape - 3/16" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 15.24m.	SA	—	12	187.5	—
152-73 1/4" Thick	Low Density Closed Cell PVC Foam Tape - 1/4" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 10.66m.	SA	—	12	250	—
152-74 3/8" Thick	Low Density Closed Cell PVC Foam Tape - 3/8" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 9.14m.	SA	—	12	375	—
152-75 1/2" Thick	Low Density Closed Cell PVC Foam Tape - 1/2" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 7.62m.	SA	—	12	500	—
152-76 3/4" Thick	Low Density Closed Cell PVC Foam Tape - 3/4" Thickness. Uses: Sound Deadening, Cushioning, Shock Absorbing, Sealing & Gasketing. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 4.57m.	SA	—	12	750	—

Please note: Values are averages only and may vary within industry tolerances.
The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: SA - Solvent Acrylic



Product QUALITY and INNOVATION, a SHARP FOCUS on CUSTOMER SERVICE, ongoing TECHNOLOGY investments and a TRAINED and MOTIVATED WORKFORCE are the KEYS to Cantech's decades of continued SUCCESS.

Single Coated







Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
157-00	Kapton® (Polyimide) Film Tape - Resist 500°F. Uses: Gold Finger Masking, Coil Insulation & High Temperature Harness Wrapping. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 33m.	SL	30	25	2.5	60
158-00	Teflon PTFE Film Tape - Resist 500°F. Uses: Non-stick roller covering, electric insulation for wire cables, lining of spray booth. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 33m.	SL	30	30	3.5	100
162-12	Teflon® (PTFE) Film Tape - Resist 500°F. Uses: UL Recognized Uses: High Temp. Resistance, Non Stick Surfaces and Protection in Flat Die Extrusion. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 32m.	SA	55	50	12.5	300
White (10)						
204-**	UV Treated Polypropylene Tape - Resists UV and Weathering. Uses: Splicing of Paper & Film. Splicing and Repairing of Greenhouse Film. Available dimensions: Widths – 48mm, 72mm • Lengths – 66m.	SA	30	40	3	140
3 Colors	Clear (00) White (10) Red (02)					
217-07	Polyester Film/Silicone Adhesive Tape - Resist 350°F. Uses: Powder Coating, Splicing of Siliconized Paper, Composite Bonding. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm, 50.8mm • Lengths – 66m.	SL	23	45	3.6	100
Green (07)						
218-21	Silver Metalized Polyester Film Tape - Resist 302°F. Uses: Reflective Shielding, Splicing Detection, Light Reflection, Decorative Trim. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm, 50.8mm • Lengths – 66m.	SA	20	29	1.9	100
Silver (21)						
537-**	Self Fusing Silicone Tape - Assures airtight, leak and water resistant seal. Uses: Pipe Wrap for Corrosion and Dirt Protection, Color Coding Wrap. Available dimensions: Widths – 1", 2" • Lengths – 12 yards.	—	80 PSI	—	20 & 30	300
5 Colors	Black (01) Red (02) Yellow (05) Blue (08) Grey (21)					
570-08	Blue PVC Fine Line Masking Tape - Resist 176°F for 30 minutes. Uses: Striping and Color Separation. Available dimensions: Widths – 3mm, 6mm, 9mm, 12mm • Lengths – 33m.	NR	14	22	5	150
Blue (08)						

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic SL - Silicone

QUALITY TAPES FOR SO MANY APPLICATIONS

Single Coated










Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %		
 571-** 7 Colors	Solid Colored PVC Tape - Available in 7 Colors. Uses: Lane Marking, Physical Hazard/ Caution. Available dimensions: Widths – 25mm, 50mm, 75mm • Lengths – 33m.	NR	18	30	7	160		
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> <td>Green (07)</td> </tr> <tr> <td>Blue (08)</td> <td>White (10)</td> <td>Dark Blue (14)</td> <td></td> </tr> </table>						Black (01)	Red (02)
Black (01)	Red (02)	Yellow (05)	Green (07)					
Blue (08)	White (10)	Dark Blue (14)						
 571-51	Striped Colored PVC Tape - Available in yellow/black. Uses: Lane Marking, Physical Hazard/ Caution. Available dimensions: Widths – 50mm, 75mm • Lengths – 33m.	NR	18	30	7	160		
 574-** 4 Colors	Solid Colored Polyethylene Tape - Available in 4 Colors. Uses: Lane Marking, Physical Hazard/ Caution, Color Coding, Pipe Wrap. Available dimension: Width – 48mm • Lengths – 33m.	NR	20	40	7	85		
	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> </table>						Black (01)	Red (02)
Black (01)	Red (02)	Yellow (05)	White (10)					
 583-01 Black (01)	10Mil Pipe Wrap Tape - Meets the UPC® as per IAPMO standards PS-37-90. Uses: For protection of underground and above ground pipelines. Available dimensions: Widths – 24mm, 48mm, 96mm • Lengths – 30m.	BR	26	80	10	130		

Please note: Values are averages only and may vary within industry tolerances.
 The final user must assure product suitability for the application and assumes all risks and liabilities.
 Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber BR - Butyl Rubber



Double Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 85-00	Double Sided Cloth Tape - Provides Strength and High Tack. Uses: Uneven Surfaces, Holding Carpet, Linoleum & Underlay. Available dimension: Width – 48mm • Lengths – 33m.	NR	35	37	11	7
 87-01	Double-Sided Outdoor Carpet Tape - high strength black polypropylene scrim coated with a very aggressive adhesive on both side. Uses: Adheres to a wide variety of outdoor surfaces and will remain stuck throughout the seasons. Available dimension: Width – 48mm • Lengths – 33m.	NR BR	80	50	14	44
 401-00	High Performance Double Sided Tissue Tape - Resist from -10°F to 250°F Uses: Corrugated Paper, Heavy Paper & Film Splicing. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 50m.	SA	8	54	3.5	4
 403-00	Double Sided Crepe Paper Tape - Good Tensile, High Tack & Shear Adhesive. Uses: General Purpose Bonding and Splicing of Paper, Film, Fabrics, Wood and Mounting of Golf Grips. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	SR	21	110	8	7
 404-00	Double Sided Flatback Paper Tape - Good Tensile, High Tack & Shear Adhesive. Uses: General Purpose Bonding and Splicing of Paper, Film & Fabrics. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	SR	28	80	6.5	6
 406-00	Double Sided High Tensile Flatback Tape - Very High Tensile. Uses: High Stress Splicing, Silk Screen Industry & Golf Grip. Available dimensions: Widths – 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	NR	35	55	6.6	3
 407-00	Double Sided Crepe Paper Tape - Good Wet Grab. Uses: Holding Plates in Printing Industry, Splicing & Mounting. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 33m.	NR	23	45	5	8
 408-00	Double Sided Polyester Tape - Resists to 390°F for 30 seconds. Uses: Splicing, Bonding, Laminating & Mounting. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm • Lengths – 33m.	SA	10	80	3	50
 409-00	Double Sided UPVC Tape - Excellent Aging and UV Resistance, Acrylic Adhesive. Uses: Holding Name Plates, Vinyl Extrusions. Bonding Plastics, Metal & Wood. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 50m.	SA	10	100	10	5

Please note: Values are averages only and may vary within industry tolerances.

The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: **NR** - Natural Rubber **SA** - Solvent Acrylic **WA** - Water Acrylic **SR** - Synthetic Rubber (HM) **BR** - Butyl Rubber

QUALITY TAPES FOR SO MANY APPLICATIONS

Double Coated

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 412-00 1" core	Reverse Wound Adhesive Transfer Tape - Is pH Neutral and UV Resistant. Uses: Picture Framing Industry, Mounting & Paper Splicing. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m.	SA	—	60	2	—
 412-30 3" core	Regular Wound Adhesive Transfer Tape - High Tack/Shear. Uses: Mounting, Paper Splicing. Is pH Neutral and UV Resistant. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	SA	—	40	2	—
 413-92 3" core	Scrim Reinforced Adhesive Transfer Tape - High Tack/Shear. Uses: Splicing, Laminating, Carpet Cove Installation, Permanent Bonding. Available dimensions: Widths – 24mm, 36mm, 48mm, 89mm, 152mm • Lengths – 50m.	WA	—	120	9.2	—
 414-00 1" core	Reverse Wound Adhesive Transfer Tape - Heavier Adhesive Mass. Is pH Neutral and UV Resistant. Uses: Splicing, Gap Filling, Mounting & Laminating. Available dimensions: Widths – 12mm, 18mm • Lengths – 16.5m.	SA	—	80	5	—
 414-30 3" core	Regular Wound Adhesive Transfer Tape - Heavier Adhesive Mass. Uses: Splicing, Gap Filling, Mounting & Laminating. Available dimensions: Widths – 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 33m.	SA	—	80	5	—
 420-10 1/8" Thick	Double Sided Close Cell Polyethylene Foam Tape - Shear Performance. Uses: Gasketing, Sealing, Mounting & Joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 16.5m.	SA	—	125	125	—
 421-10 1/16" Thick	Double Sided Close Cell Polyethylene Foam Tape - Shear Performance. Uses: Gasketing, Sealing, Mounting & Joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 33m.	SA	—	125	62.5	—
 422-10 1/32" Thick	Double Sided Close Cell Polyethylene Foam Tape - Shear Performance. Uses: Gasketing, Sealing, Mounting & Joining. Available dimensions: Widths – 12mm, 18mm, 24mm • Lengths – 66m.	SA	—	125	31	—
 425-25 White (10)	Very High Bond Acrylic Tape - Permanent Bond. Replaces Mechanical Fasteners. Uses: Auto Trim Attachment, Furniture, Appliance & Signs Assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 66m.	SA	200	90	25	500
 425-45 White (10)	Very High Bond Acrylic Tape - Permanent Bond. Replaces Mechanical Fasteners. Uses: Auto Trim Attachment, Furniture, Appliance & Signs Assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 33m.	SA	200	90	45	500
 426-10 Clear (00)	Very High Bond Acrylic Tape - Permanent Bond. Replaces Mechanical Fasteners. Uses: Lamination and Bonding of Clear Substrates, Furniture & Appliance Assembly. Available dimensions: Widths – 12.7mm, 19mm, 25.4mm • Lengths – 55m.	SA	150	60	10	1000
 431-00	Double-Coated Polyethylene Film - Aggressive synthetic rubber-based adhesive. Uses: Splicing, Holding, Joining & Mounting Applications. Carpet Installation. Available dimensions: Widths – 48mm • Lengths – 5m, 10m, 33m , 66m.	SR	4	50	3	100
 448-00	Double-Coated Polyester Film Tape - High Tack Ultra Clear Adhesive. Uses: Difficult splicing, Holding, Joining, Attaching, Mounting and Laminating applications. Available dimension: Width – 48mm • Lengths – 33m.	CA	10	120	4.5	50
 85109	Enclosure (Double-Sided) Tape - Medium Tack Adhesive for all Types of Surfaces. Uses: To hold Temporary Polyethylene Doors and polyethylene on delicate surfaces. Available dimension: Width – 48mm • Lengths – 18.28m.	NR	35	39/18	14	7


Please note: Values are averages only and may vary within industry tolerances.

The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: SA - Solvent Acrylic WA - Water Acrylic SR - Synthetic Rubber (HM) CA - Clear Acrylic

Canadian Technical Tape formulates and manufactures pressure sensitive tapes for the ever changing product needs of our customers and their markets. Founded in 1950, the company remains privately held and has over 300,000 square feet of modern manufacturing and warehousing facilities located in Tennessee (USA), Ontario and Quebec (Canada).






We have maintained steady growth, moving into different markets with new and reformulated products. Our customer base includes distributors worldwide in a range of markets – Industrial, Hardware, Medical, Packaging and Construction. Our assortment of over 100 industrial products makes Cantech the choice for so many pressure sensitive tape requirements.

cantech[®]





Strapping & Filament

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 172-**	MOPP Performance Appliance Tape - Clean Removal. Uses: Holding and fixing of appliance components, cabinets and furniture. Can also be used for medium duty bundling and palletizing. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm • Lengths – 55m.	NR	100	30	3	35
2 Colors	Blue (08) White (10)					
 173-00	Polyethylene Pallet Stretch Tape - Stretches over 500% and does not break! Uses: Unitize banding of produce, in-house banding, banding that requires ventilation. Available dimensions: Width – 36mm • Lengths – 66m, 440m.	SR	26	50	6.5	500
Clear (00)						
 174-10	MOPP Utility Strapping Tape - Good Stretch. Uses: Palletizing of Boxes, Holding & Securing Items in Transit. Available dimensions: Widths – 9mm, 12mm, 18mm, 24m • Lengths – 55m.	WA	90	32	3	35
White (10)						
 175-01	MOPP General Purpose Strapping Tape - UV Resistant & Good Impact Strength. Uses: UV & Weathering Resistance Makes it ideal for Outdoor Applications. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm • Lengths – 55m.	WA	150	32	4.5	40
Black (01)						
 176-**	MOPP Utility Strapping Tape - Good Strength. Uses: Palletizing of Boxes, Holding & Securing Items in Transit. Available dimensions: Widths – 9mm, 12mm, 18mm • Lengths – 110m.	SR	100	60	3	35
3 Colors	Clear (00) Black (01) White (10)					
 179-00	General Purpose Filament Tape - High Tack & Shear. Uses: Palletizing, Strapping, Bundling & Reinforcing. Available dimensions: Widths – 9mm, 12mm, 18mm, 24mm, 36mm, 48mm, 72mm • Lengths – 55m.	SR	110	90	4.5	6
 180-00	Industrial Grade Filament Tape - High Tack & Shear. Uses: Palletizing, Strapping, Bundling & Reinforcing. Available dimensions: Widths – 12mm, 18mm, 24mm, 48mm • Lengths – 55m.	SR	160	95	5	6
 181-00	High Tensile Filament Tape - High Tack & Shear. Uses: Palletizing, Strapping, Bundling & Reinforcing. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	SR	200	95	5.5	6
 183-00	Cold Application Filament Tape - Application temperature >41°F. Uses: Palletizing, Strapping, Bundling & Reinforcing in Cold Storage Room Applications (Foods, Fruits & Meats). Available dimensions: Widths – 12mm, 18mm, 24mm, 48mm • Lengths – 55 m.	SR	110	80	5	5
 184-00	Paper Backed Filament Tape - Can Write on Paper Backing. Uses: Palletizing, Strapping, Bundling & Sealing. Available dimensions: Widths – 18mm, 24mm • Lengths – 55m.	SR	165	65	8	6
 188-00	High Performance Filament Tape - High Tensile Resistance. Uses: Palletizing, Strapping, Bundling & Sealing. Available dimensions: Widths – 12mm, 18mm, 24mm, 48mm • Lengths – 55 m.	SR	300	100	6	6
 191-00	Bi-Directional Filament Tape - Provides Good Tensile in Both Directions. Uses: Palletizing, Strapping, Bundling. Reinforcing & Securing Heavy Cartons. Available dimensions: Widths – 18mm, 24mm, 48mm • Lengths – 55m.	SR	145 /50	100	6.5	3

Please note: Values are averages only and may vary within industry tolerances.
The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.


Adhesives: NR - Natural Rubber WA - Water Acrylic SR - Synthetic Rubber (HM)

Electrical

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %						
 330-01 Black (01)	Vinyl 7mil UL-CSA Electrical Tape - Very Conformable & Water Resistant. Uses: Electric Wire Insulation, Solvent & Corrosion Protection. Rated for: 19°F to 175°F. 600 Volts. Available dimensions: Width – 18mm • Lengths – 18m. Width – 18mm • Lengths – 20m.	NR	20	18	7	225						
 330-02 5 Colors	Vinyl 7mil UL-CSA Electrical Tape - Very Conformable & Water Resistant. Uses: Electric Wire Insulation, Solvent & Corrosion Protection. Rated for: 19°F to 175°F. 600 Volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	20	18	7	225						
	<table border="1"> <tr> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td></td> </tr> </table>	Red (02)	Yellow (05)	White (10)	Green (07)	Blue (08)						
Red (02)	Yellow (05)	White (10)										
Green (07)	Blue (08)											
 388-01 Black (01)	Vinyl 8.5mil UL-CSA Electrical Tape - Softer Film & Adhesive for Cold Application. Uses: Electric Wire Insulation, Solvent & Corrosion Protection. Rated for: -4°F to 194°F. 600 Volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	22	18	8.5	200						
 389-01 Black (01)	Vinyl 8mil UL-CSA Electrical Tape - Indoor/Outdoor Application. Uses: Electric Wire Insulation, Solvent & Corrosion Protection. Rated for: -4°F to 194°F. 600 Volts. Available dimension: Width – 18mm • Lengths – 20m.	NR	22	18	8	200						

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber

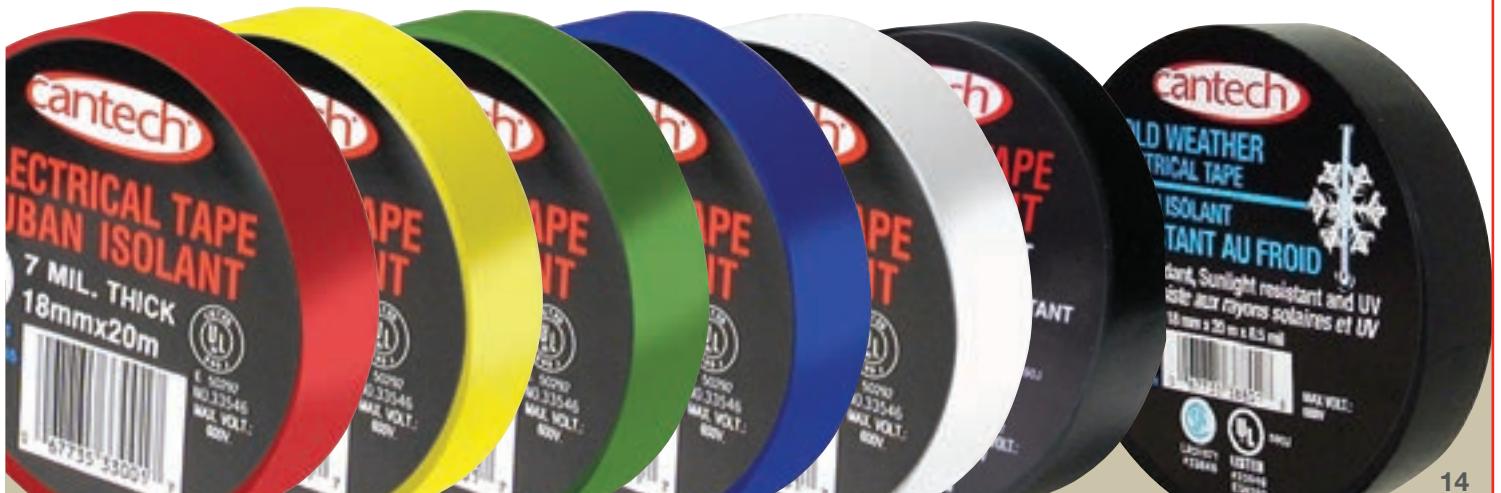

Film

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %						
 206-00 1" core	Cellulose Tape - Static Free. Uses: Sealing, Holding, Packaging & Taping. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m. Widths – 12mm, 18mm, 24mm • Lengths – 66m.	NR	25	40	2	20						
 208-00 1" core	Clear BOPP Office Tape - Does not Discolor, Remains Clear. Uses: Sealing, Holding, Packaging & Taping. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m, 66m.	WA	16	20	1.8	150						
 210-72	Premium Grade Packaging Film Tape - Resistant to various chemicals and corrosion. Uses: Sealing, Holding, Packaging, Splicing, Bundling & Taping in manufacturing. Available dimensions: Widths – 24mm, 48mm • Lengths – 66m, 200m.	SA	16	25	2	140						
 222-** 5 Colors 3" core	PVC Produce Bundling Tape - Excellent for Color coding. Uses: Bag Sealing, Identification tape. Available dimensions: Widths – 9mm, 12mm • Lengths – 66m.	NR	28	17	2.1	150						
	<table border="1"> <tr> <td>Red (02)</td> <td>Yellow (05)</td> <td>White (10)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td></td> </tr> </table>	Red (02)	Yellow (05)	White (10)	Green (07)	Blue (08)						
Red (02)	Yellow (05)	White (10)										
Green (07)	Blue (08)											
 280-00 1" core	Matte Polypropylene Tape - Can be written on and is invisible once applied. Uses: Sealing, Holding, Packaging & Taping. Available dimensions: Widths – 12mm, 18mm • Lengths – 33m.	WA	25	10	2	50						

Please note: Values are averages only and may vary within industry tolerances.







The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic WA - Water Acrylic

We deliver
PERSONAL SERVICE,
SUPERIOR QUALITY and
a **GREAT PRODUCT MIX.**










Box Sealing

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 223-** Polyester (PET) Box Sealing Tape - Complies with ASTM D 1974-92 & FDA Drug & Cosmetic Act, CFR Title 21, Supart B, par. 1705. Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	40	55	3.5	150
	Clear (00) Tan (04)					
 225-** Polyester (PET) Box Sealing Tape - Complies with ASTM D 1974-92 & FDA Drug & Cosmetic Act, CFR Title 21, Supart B, par. 1705. Uses: Box Sealing in Food & Drug Markets. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	30	45	2	110
	Clear (00) Tan (04)					
 227-** High Performance Polyester Box Sealing Tape - Meets ASTM-D5486 Type 1 Class 1 (Tan) Class 2 (Transparent). Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 55m.	2 Colors	SR	60	90	3	100
	Clear (00) Tan (04)					
 229-** Heavy Duty BOPP Box Sealing Tape - Strength, Wet Grab. Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	46	80	3	140
	Clear (00) Tan (04)					
 231-** Premium BOPP Box Sealing Tape - Strength, Wet Grab. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	35	75	2.5	140
	Clear (00) Tan (04)					
 233-** Industrial Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	35	70	2.2	140
	Clear (00) Tan (04)					
 235-** Production Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	2 Colors	SR	30	65	2	90
	Clear (00) Tan (04)					
 237-** Production Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	8 Colors	SR	30	65	2	90
	Black (01) Red (02) Tan (04) Yellow (05) Green (07) Blue (08) White (10) Orange (11)					
 239-00 Label Protection Tape - Strong, resists abrasion, moisture & chemicals. Uses: Designed to protect labels and packing lists, used on prescription labels. Available dimensions: 72mm, 96mm, 120mm, 144mm • Lengths – 66m.		SR	27	40	1.8	100

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: SR - Synthetic Rubber (HM)

Box Sealing

Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 241-00	Cold Application BOPP Box Sealing Tape - Application temperature >41°F. Uses: Box Sealing in Food Processing Plant. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	SR	30	45	2	90								
 241-**	Cold Application BOPP Box Sealing Tape - Application temperature >41°F. Uses: Box Sealing in Food Processing Plant. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	SR	30	45	2	90								
8 Colors Minimum Applies)	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)					
Black (01)	Red (02)	Tan (04)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Orange (11)											
 243-**	General Purpose BOPP Box Sealing Tape - Good Strength & Adhesion. Uses: Box Sealing, Holding, Bundling & Label Protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	SR	27	55	1.7	80								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 253-**	USA BOPP Box Sealing Tape - Made in USA with BOPP Blown Film, is stronger, has less Elongation (stretch). Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	SR	29	65	1.8	80								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 257-00	Aqueous Based Acrylic Adhesive BOPP Box Sealing Tape - Good Strength & UV Resistance. Uses: Box Sealing, Holding, Bundling & Label Protection. Tape won't Discolor. Available dimensions: Widths – 48mm, 72mm • Lengths – 100m.	WA	20	20	1.8	160								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 263-**	Economy Grade BOPP Box Sealing Tape - Good Strength & Adhesion. Uses: Box Sealing, Holding, Bundling & Label Protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 50m, 100m.	SR	24	50	1.6	70								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 6235-**	Stock Printed Box Sealing Tape - Ease of Identification, discourages pilferage. Uses: Box, Parcel and Envelope closure. Holding and bundling. Available dimension: Width – 48mm • Lengths – 100m 6235-1011 (Fragile), 1012 (Packing Slip Enclosed) 1016 (Tamper Proof).	SR	25	42	1.8	130								
White With Red Print														










Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: WA - Water Acrylic SR - Synthetic Rubber (HM)



We offer a wide selection of box sealing tapes to meet your specific application requirements. Heavy Duty, General Purpose, Cold Temperature and Production Grades are all manufactured with the most advanced technology providing quality and consistency.

Box Sealing







Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %								
 121-11	System Length Paper Box Sealing Tape - Conformability, Recyclable, Easy to tear by hand. Uses: Box Sealing where boxes need to be opened without the use of a cutting tool. Available dimensions: Widths – 48mm, 72mm • Lengths – 548m.	SR	18	50	6	5								
 224-**	Polyester (PET) Box Sealing Tape - Complies with ASTM D 1974-92 & FDA Drug & Cosmetic Act, CFR Title 21, Supart B, par. 1705. Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	40	55	3.5	150								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 226-**	Polyester Box Sealing Tape - Complies with ASTM D 1974-92 & FDA Drug & Cosmetic Act, CFR Title 21, Supart B, par. 1705. Uses: Box Sealing in Food & Drug Markets. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	30	45	2	110								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 228-**	High Performance Polyester Box Sealing Tape - Meets ASTM-D5486 Type. Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	60	90	3	100								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 230-**	Heavy Duty BOPP Box Sealing Tape - Strength, Wet Grab . Uses: Box Sealing Where Moisture and High Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	46	80	3	140								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 232-**	Premium BOPP Box Sealing Tape - Strength, Wet Grab. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	35	75	2.5	140								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 234-**	Industrial Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	SR	35	70	2.2	140								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 236-**	Production Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	30	65	2	90								
2 Colors	<table border="1"> <tr> <td>Clear (00)</td> <td>Tan (04)</td> </tr> </table>	Clear (00)	Tan (04)											
Clear (00)	Tan (04)													
 238-**	Production Grade BOPP Box Sealing Tape - Strength, High Tack. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	30	65	2	90								
8 Colors	<table border="1"> <tr> <td>Black (01)</td> <td>Red (02)</td> <td>Tan (04)</td> <td>Yellow (05)</td> </tr> <tr> <td>Green (07)</td> <td>Blue (08)</td> <td>White (10)</td> <td>Orange (11)</td> </tr> </table>	Black (01)	Red (02)	Tan (04)	Yellow (05)	Green (07)	Blue (08)	White (10)	Orange (11)					
Black (01)	Red (02)	Tan (04)	Yellow (05)											
Green (07)	Blue (08)	White (10)	Orange (11)											

Please note: Values are averages only and may vary within industry tolerances.
The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: SR - Synthetic Rubber (HM)

QUALITY TAPES FOR SO MANY APPLICATIONS

Box Sealing







Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 242-** 2 Colors	Cold Application BOPP Box Sealing Tape - Application temperature >41°F. Uses: Box Sealing in Food Processing Plant. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	30	45	2	90
	Clear (00) Tan (04)					
 242-** 7 Colors (Minimum Applies)	Cold Application BOPP Box Sealing Tape - Application temperature >41°F. Uses: Box Sealing in Food Processing Plant. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	30	45	2	90
	Black (01) Red (02) Yellow (05)					
	Green (07) Blue (08) White (10) Orange (11)					
 244-** 2 Colors	General Purpose BOPP Box Sealing Tape - Good Strength & Adhesion. Uses: Box Sealing, Holding, Bundling & Label Protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	27	55	1.7	80
	Clear (00) Tan (04)					
 254-** 2 Colors	USA BOPP Box Sealing Tape - Made in USA with BOPP Blown Film, is stronger, has less elongation (stretch) than Cast BOPP Films. Uses: Box Sealing Where Moisture and Impact Resistance is Required. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	29	65	1.9	80
	Clear (00) Tan (04)					
 258-00	Aqueous Based Acrylic Adhesive BOPP Box Sealing Tape - Good Strength & UV Resistance. Uses: Box Sealing, Holding, Bundling & Label Protection. Tape won't discolor. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m.	WA	20	20	1.8	160
	Clear (00)					
 264-** 2 Colors	Economy Grade BOPP Box Sealing Tape - Good Strength & Adhesion. Uses: Box Sealing, Holding, Bundling & Label Protection. Available dimensions: Widths – 48mm, 72mm • Lengths – 914m, 1372m, 1828m.	SR	24	50	1.6	70
	Clear (00) Tan (04)					

Please note: Values are averages only and may vary within industry tolerances. The final user must assure product suitability for the application and assumes all risks and liabilities. Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: WA - Water Acrylic SR - Synthetic Rubber (HM)



Construction







Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 85109	Enclosure (Double-Sided) Tape - Medium Tack Adhesive for all Types of Surfaces. Uses: To hold Temporary Polyethylene Doors and polyethylene on delicate surfaces. Available dimension: Width – 48mm • Lengths – 18.28m.	NR	35	39/18	14	7
 89-21	Aluminum Foil Tape - 40 Micron - Resist to 14°F to 248°F. UL-723 Listed Uses: Joining /Sealing Duct Work, Insulation, Seaming, Sealing & Patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	16	75	2.9	2
Silver (21)						
 90-21	Aluminum Foil Tape - 50 Micron - Resist to 14°F to 248°F. UL-723 Listed Uses: Joining /Sealing Duct Work, Insulation, Seaming, Sealing & Patching. Available dimensions: Widths – 48mm, 72mm • Lengths – 45m, 90m.	SA	20	75	3.5	3
Silver (21)						
 168-01	General Purpose Anti-Slip Tape - Durable & Easy to Apply. Indoor Use. Uses: Walkways, Ramps, Stairways & Work Areas. Available dimensions: Widths – 25mm, 50mm, 75mm, 150mm • Lengths – 18.28m.	NR	—	50	27	—
Black (01)						
 201-21	Metalized BOPP Splicing and Seaming Tape - High Shear. Uses: Seaming Overlap Splice of Radiant Reflective Insulation Material. Splicing Foil, Film & Paper. Available dimensions: Widths – 48mm, 72mm • Lengths – 110m.	SA	30	45	3	140
Silver (21)						
 202-**	FlexPro® UL-181B-FX Listed Flexible Duct Tape - Alternative to Aluminum Tape. Uses: Sealing of Flexible Air Ducts and Connectors. Seal Pipe Foam Insulation. Available dimensions: Widths – 48mm, 72mm • Lengths – 110m.	SA	30	40	3	140
2 Colors						
	Black (01)					
	Silver (21)					

Please note: Values are averages only and may vary within industry tolerances.
The final user must assure product suitability for the application and assumes all risks and liabilities.
Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic

QUALITY TAPES FOR SO MANY APPLICATIONS

Construction










Product #	Product Description	Adhesive	Tensile lb/in	Adhesion oz/in	Thickness mil	Elongation %
 204-** Contractor's Sheathing Tape - Excellent UV Resistant Solvent Acrylic. Uses: Overlap Splicing of Insulation Materials (House Wrap). Available dimensions: Widths – 48mm, 72mm • Lengths – 50m. 3 Colors	Clear (00)	SA	30	40	3	140
	Red (02)					
 249-** Polyethylene Masking Tape for Stucco Application - Resists UV for 30 Days. #249-** is Serrated Edge slit, Hand Tear. 250-** Uses: Masking Surfaces on Outdoor Stucco Applications. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m. 2 Colors	Red (02)	NR	23	50	7	120
	White (10)					
 251-** Polyethylene Tape - Conforms well to wide range of surfaces. #251-** is Serrated Edge slit, Hand Tear. 252-** Uses: Splicing of Polyethylene, patching and repairing a variety of surfaces. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m. 2 Colors	Red (02)	NR	23	50	7	100
	White (10)					
 277-10 Polyethylene Splicing/Masking Tape - Resists UV. #277-10 is Serrated Edge slit, Hand Tear. 278-10 Uses: Splicing of Polyethylene, Hippwrap & Holding Poly Sheeting. Available dimensions: Widths – 48mm, 72mm, 96mm • Lengths – 55m. White (10)		NR	25	65	9	120
 560-** Adhesive Mats - Tacky walk-on mats. Uses: Cleans dust and dirt from shoe soles. 2 Colors	Blue (08) Available dimensions: 24" x 36", 26" x 45", 31" x 51" (30 mats/set, 4 sets/case).	WA	22	18	2	—
	White (10) Available dimensions: 24" x 36" (30 mats/set, 4 sets/case).					
 560-08 Base Adhesive Mats on anti-slip base - Tacky walk-on mats. Uses: Cleans dust and dirt from shoe soles. Available dimensions: 24" x 36" (one set of 30 mats per base). Blue (08)		WA	22	18	2	—

Please note: Values are averages only and may vary within industry tolerances.
 The final user must assure product suitability for the application and assumes all risks and liabilities.
 Dimensions – Custom dimensions other than those listed may be available based upon minimum order requirements.

Adhesives: NR - Natural Rubber SA - Solvent Acrylic WA - Water Acrylic



Dispensers

	Product Description	Core Diameter	Max. Width	Max. Length
	805 Cello-Desk Tape Dispenser	1" - 3"	24mm	66m
	806 Cello-Executive Desktop Dispenser	1"	18mm	33m
	808 ATG Dispenser	1"	18mm	33m
	841 Box Sealer (Mouse Trap) Dispenser	1" - 1.5" - 3"	48mm	132m
	842 Adjustable Tension Box Sealer Dispenser	3"	72mm	132m
	845 Adjustable Tension Box Sealer Dispenser	3"	48mm	132m
	846 Box Sealer (Mouse Trap) Dispenser	1" - 1.5" - 3"	72mm	132m
	860 Produce Bag Sealer Dispenser With Bag Trimmer	3"	12mm	55m
	889 Strapping Tape Dispenser	3"	24mm	55m



Cantech meets the requirements of the RTM program.



Industrial Catalog

cantech.com



**455 Côte-Vertu Road
St-Laurent, Quebec, Canada H4N 1E8**



**2222 Eddie Williams Road
Johnson City, TN. USA 37601-2871
Tel. 423.928.8331 Fax 423.928.0311
Toll Free: 800.654.3947**



**1400 Rosemount Avenue
Cornwall, Ontario, Canada K6J 3E6**